



Danfoss Link™ RU

The Danfoss Link™ Repeater Unit is used for extending the wireless transmission range between the Central Controller and the Floor Thermostat.

The Central Controller will support up to three Repeater Units in chain between the the CC and the relevant Floor Thermostat, giving a possible 120m range. More parallel chains of Repeater Units are possible.

The Repeater Unit will also assist in buildings where radio signals may be obstructed - heavy walls, metal object etc.

Benefits:

- Extends the range of DEVILink™ systems

Standard compliance:

- EN 60730


Approvals:

CE

Directives:

R&TTE, LVD, EMC

Type	Value
Operation voltage	230 V AC, 50 Hz
Transmission frequency	868,42 MHz
Transmission range in normal buildings	Up to 30 m
Transmission power	Max. 1 mW
IP class	21
Dimension (H/W/D)	85 mm × 85 mm × 21 mm

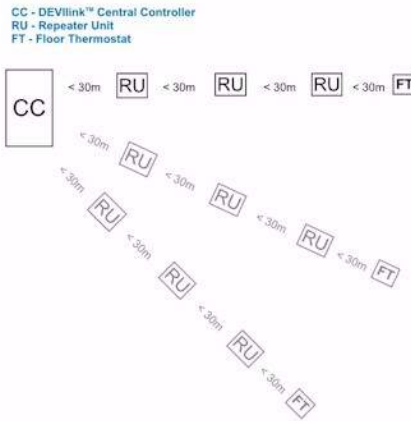

Types

Code No.	Name	Description
01-140F1138	DEVILink™ RU	Wireless Repeater unit (for larger installations).