Datasheet

Comfortline



Comfortline Design Panel heater

The Comfortline F125 Design series of panel heater is a time and temperature programmable wall mount convective panel heater. The thermostat is located on the top of the heater body and is easy to set and adjust. Time and temperature programming enables the heater to be used at its up-most efficiency and enables the user to 'set and forget' the desired comfort level with peace of mind that the heater has not been inadvertently left switched on.

The heater has blunt corners which reduces the risk of injury for people that fall against it. Because the heater has a large fluted outlet vent mounted at the top front of the heater, the face of the heater is not excessive and, while it gets hot, does not result in subcutaneous burns when touched for a short period.

Standard compliance:
- AS/NZS 3350-2-30

Approvals:


Type	Value
Construction	Powder coated steel frame and facia
Insulation	Class 2 double insulated
IP Class	IP24: splash-proof
Satety Cut-out	In-built over temperature
Thermostat	Automatic 5 to 35 degrees Celsius
Mode	ON/OFF/Time and temperature programmable
Remote setback	No
Cold lead length	750mm

Heater dimensions

MODEL	Power (W)	Width (mm)	Height (mm)	Depth (mm)	Weight (kg)
02-F125-TAC 500	500	390	461	112	3.1
02-F125-TAC 1000	1000	465	461	112	3.7
02-F125-TAC 1500	1500	613	461	112	4.6
02-F125-TAC 2000	2000	760	461	112	5.5
02-F125-TAC 2500	2500	909	461	112	6.4

NOTE: Depth is the measure from the facia of the heater to the wall on which it is mounted.

MODEL	A (mm)	B (mm)	C (mm)	D (mm)
02-F125-TAC 500	120	190	245	160
02-F125-TAC 1000	195	190	245	160
02-F125-TAC 1500	342.5	190	245	160
02-F125-TAC 2000	490	190	245	160
02-F125-TAC 2500	640	190	245	160

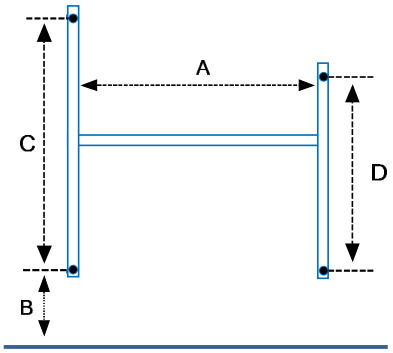

(As viewed from the front of the heater)


Do not mount the heater directly below a mains outlet or remote thermostat, or data outlet point.

Mains flex entry to the heater is on the right hand side when looking from the front.

The flex is unterminated, suitable for PC connection or fitting of 3 pin plug.

The F125 Design series wall mount panel heater is fitted with a back lit LCD time and temperature programmable thermostat which, because of its convenient position on the top of the heater body, is easy read with an easy use.

The thermostat allows for the programming of:
- Temperature.
- Switching times.
- Frost protection.
- Manual over-ride.

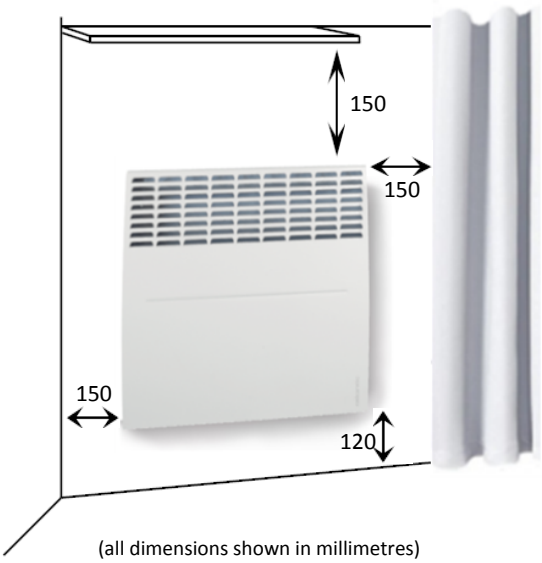

(all dimensions shown in millimetres)

DEVI Heating Systems Ltd (Head Office)
36B Sonter Road, Wigram 8042
PO Box 8582 Riccarton, Christchurch 8440
Ph 0800 468 356 / (03) 348 0070

www.devi.co.nz

DEVI Heating Systems Ltd
6C Dallan Place, Albany 0632
PO Box 101-274 North Shore, Auckland 0745
Ph 0800 927 635 / 09 415 7250